



bellQ
ENJOY LIFE IN COLOR

Q Station (BellQ)

Quick Installation Guide

For Android

(Q Bulb)

(Support Android Version: 4.2 and above)

1. Installation

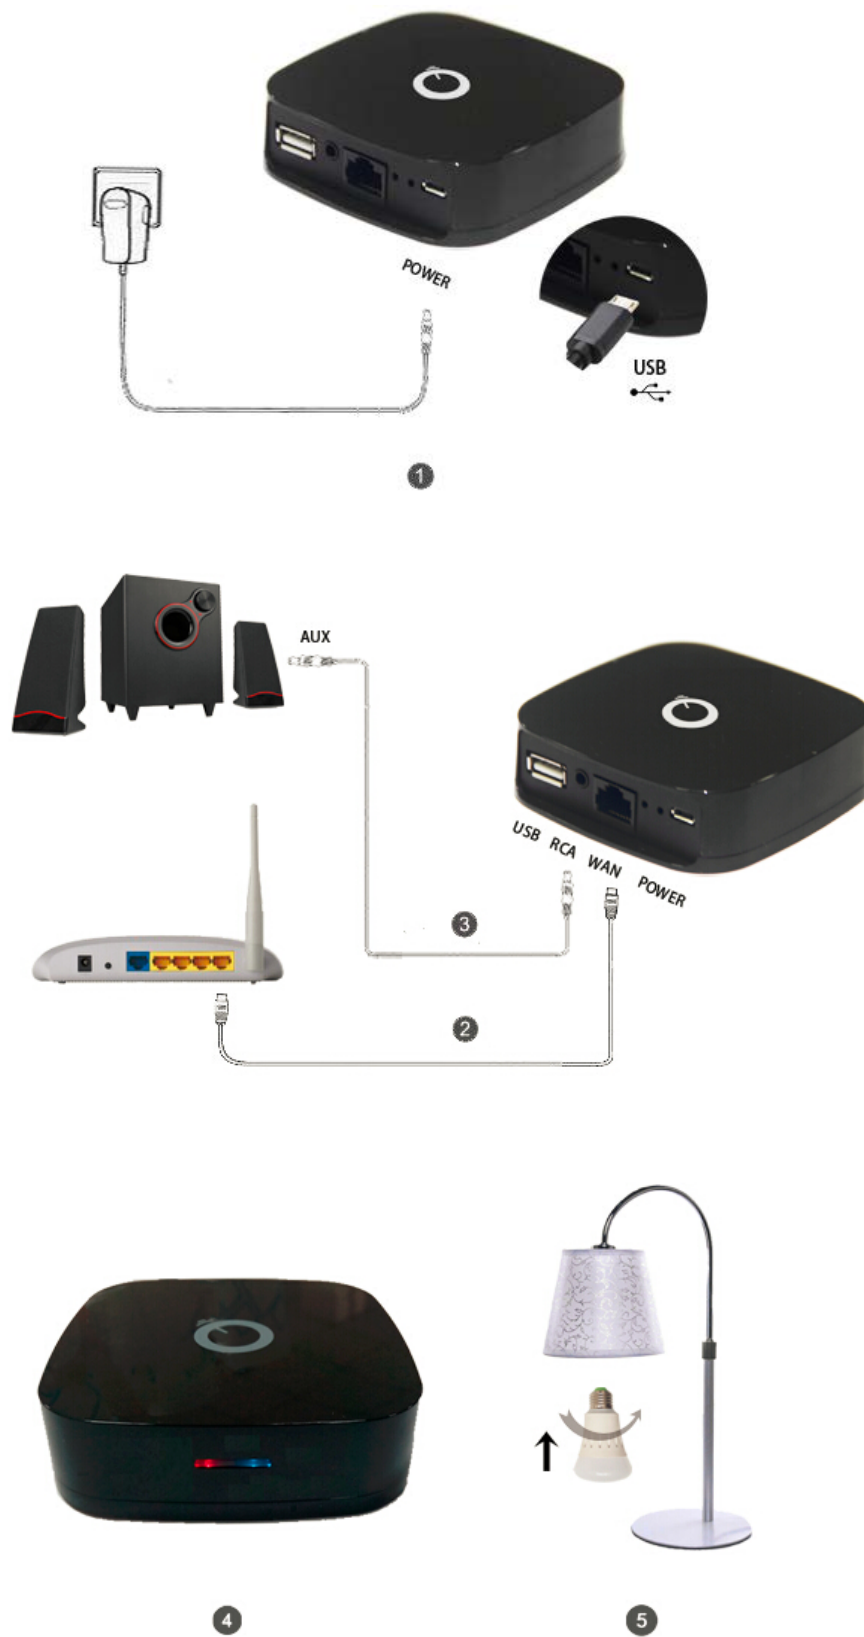


Figure 1: Power up Q Station

Installation Steps:

- 1) Plug in Power Adapter to Q Station.
- 2) Connect the Q Station to the LAN of your Home Router with LAN cable (optional).
(If you want to connect internet wirelessly, please refer to Q Station User Guide.)
- 3) Connect the Audio Cable from your Q Station to the AUX of your stereo or speaker.
- 4) Make sure the indicator light of Q Station is blinking with red (left) and blue (right).
- 5) Screw-in the Q Bulbs.

2. Connect your smart device to Wi-Fi

By changing your Wi-Fi connection to "bellnetXXXXXX", you will connect to the Q Station.

Notice:

- By default, Q Station SSID is "bellnetXXXXXX". No Encryption. (XXXXXX is the last 6 digit of your MAC)
- Once it is successfully connected to the Q Station, the right indicator light should be a steady blue color. Otherwise it will be blinking.

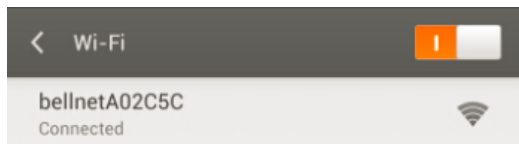


Figure 2: Connect Q Station SSID

3. Play music & Light show (use your smart phone)

- 1) Install any music APP which supports DLNA protocol (e.g. BubbleUPnP).
- 2) Run BubbleUpnp. (Figure 3)
- 3) Add one song in PLAYLIST.
- 4) In RENDERER, choose “bellmusicXXXXXX”. (Figure 4)
- 5) Click “Play” button to play music.

Notice:

- By default, Q Station Speaker Name is “bellmusicXXXXXX”.(XXXXXX is the last 6 digit of your MAC)
- DLNA protocol allows you to stream music to the stereo or speaker which is connected to the Q Station. And the Q Bulbs will blink synchronously with your music.

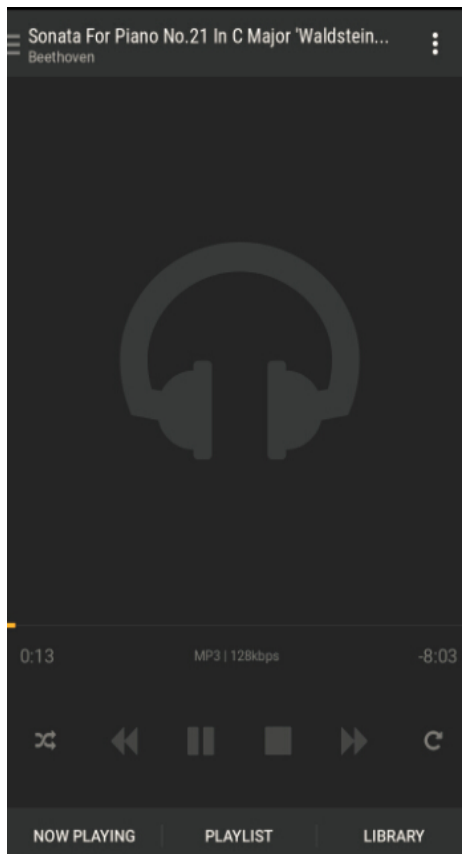


Figure 3: Use BubbleUPnP to play music

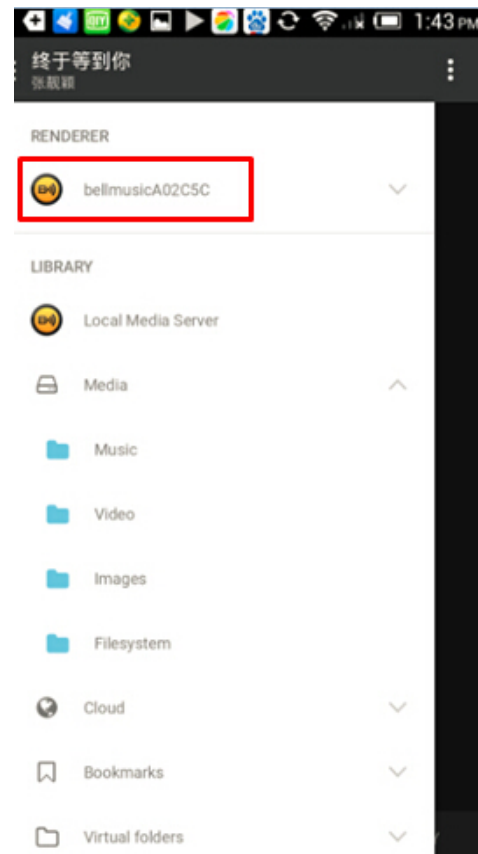



Figure 4: RENDERER choose:
“bellmusicXXXXXX” (e.g bellmusicA02C5C)

4. Lighting Control

Install BellQ

- 1) Search the APP “**BellQ**” in Google Play. Download and install it.
- 2) Run it.

Light Control

- 1) Click  first.j
- 2) Click Device SN (e.g. MQ1ACXXX00000XXX). (Figure 5)
- 3) Click the Q Bulb ID (e.g. lightX MD1ACXXX00000XXX) (Figure 6) to enter Light Control Page. (Figure 7)

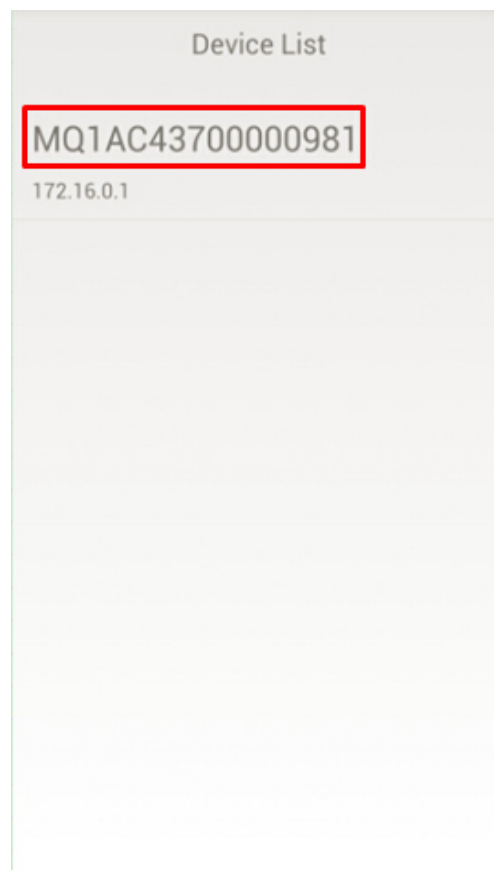


Figure 5: Click Device SN

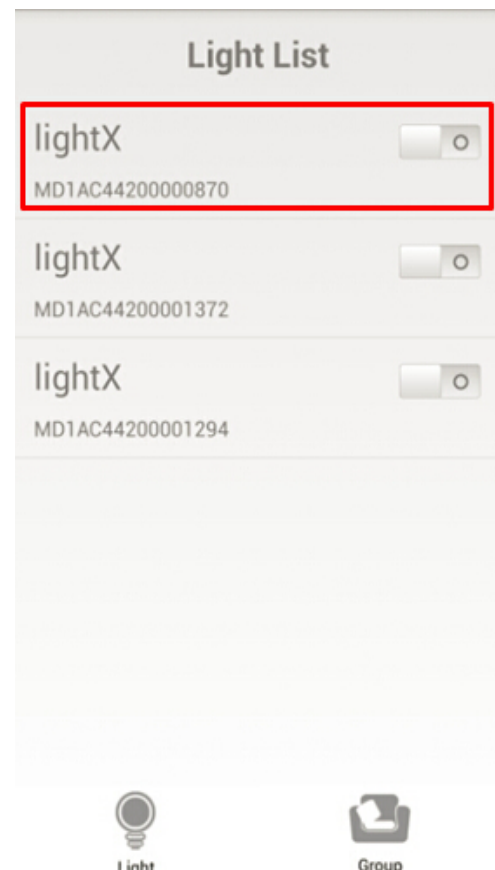


Figure 6: Click Q Bulb ID

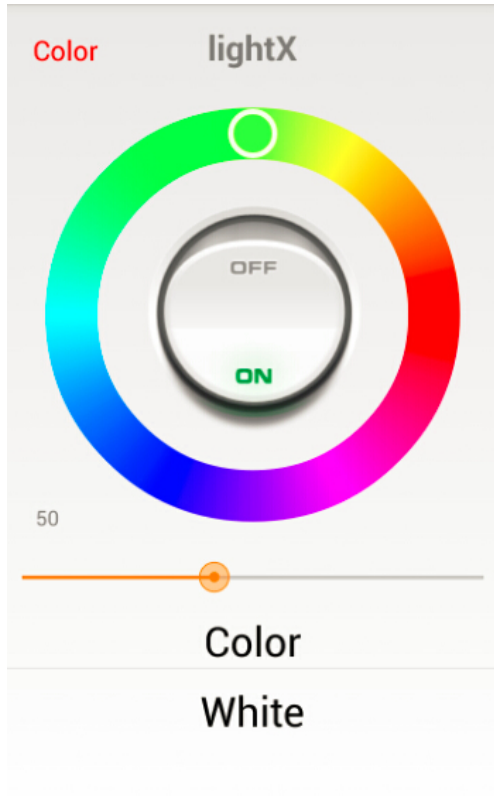




Figure 7: Light Control Page

On Light Control Page

- 1) Click ON or OFF to turn on and turn off the Q Bulb.
- 2) Slide the little circle  to adjust the color of Q Bulb.
- 3) Move the intensity bar  to adjust the brightness.

Notice: The number at the lower left of the big circle means the brightness.

On BellQ main page, click  to enter Network page:

Set password for your Q Station SSID

Click **Basic Settings** to modify the Q Station SSID & Password.


Change your speaker name

Click **Music Service** to modify the Speaker Name.

Connect to internet wirelessly

Click **Internet Connection** to connect to other Wi-Fis.

On BellQ main page, click  to enter Music List:

- 1) Select one song to enter Play Music Page. (Figure 8)
- 2) Slide screen from right to left, to enter the second page. (Figure 9)
- 3) Click  to play the song. By default, it will play on mobile. (Figure 10)
- 4) Click Speaker Name “bellmusicXXXXXX” (e.g. bellmusicA02C5C) to control play on mobile/ sound equipment. (Figure 11)
(XXXXXX is the last 6 digit of your MAC)

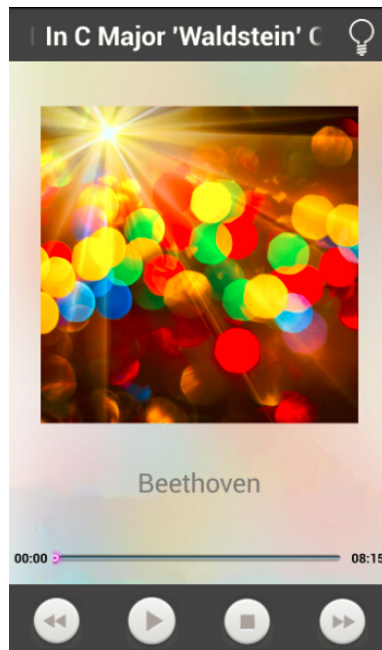


Figure 8: Play Music Page

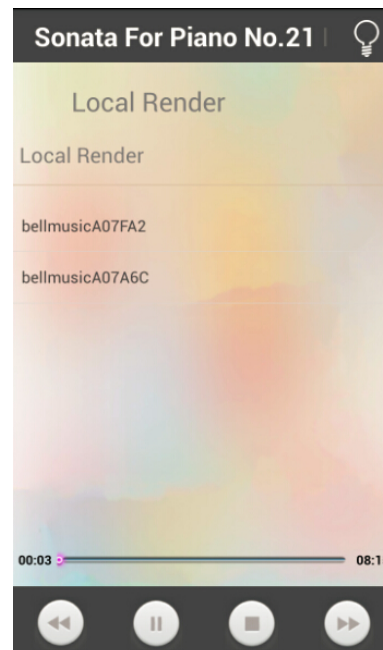


Figure 9: The second page

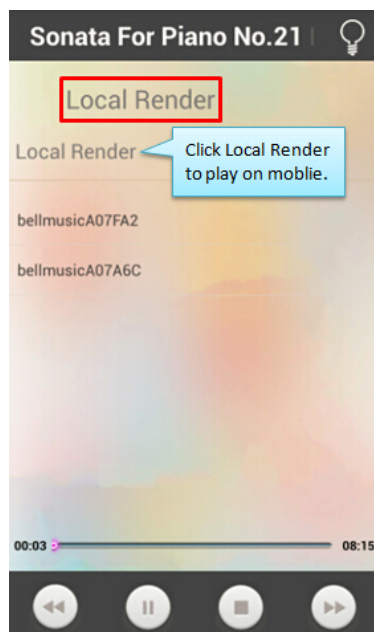


Figure 10: Play on mobile

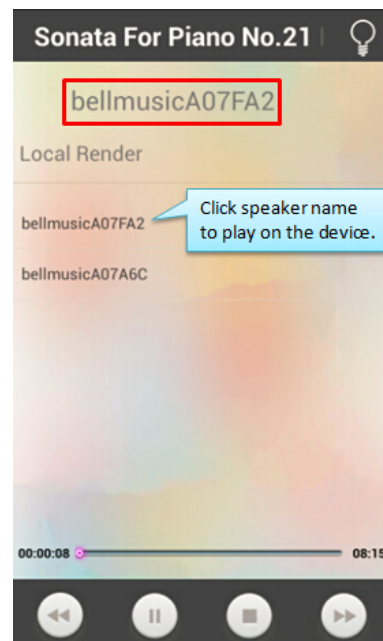


Figure 11: Play on device

(For more details, you can refer to Q Station User Guide from belleds.com.)